


Sizes for mast types:

M-100SE, M-110SE,
M-120SE:
(1 recess)

M-120E, M-140E:
(2 recesses)

H	H1	H2	H3	Z	m	n x Øs/ØM	Crown type a x a x h
m	m	m	m	mm/m	kg	mm	m
RMV-M-100SE • D_A/D_E = 98/218							F160
10	9,5	0,75	-	13,2	103	4 x M24/250	0,4 x 0,4 x 1,6
RMV-M-110SE • D_A/D_E = 84/218							F160
11	9,5	1,75	-	13,2	112	4 x M24/250	0,4 x 0,4 x 1,6
RMV-M-120SE • D_A/D_E = 72/218							F160
	9,5	2,75	-	13,2	120	4 x M24/250	0,4 x 0,4 x 1,6
RMV-M-120E • D_A/D_E = 106/218							F160
12	9,5	3,0	-	9,83	287	4 x M24/250	0,4 x 0,4 x 1,6
RMV-M-140E • D_A/D_E = 86,5/218							F160
14	9,5	5,0	-	9,82	302	4 x M24/250	0,4 x 0,4 x 1,6
RMV-M-160E • D_A/D_E = 94/360							WF450/8xM24
16	9,5	7,0	-	17,12	428	8 x M24/450	0,85x0,85x1,7
RMV-M-180E • D_A/D_E = 94/360							WF450/8xM24
18	9,5	9,0	-	15,22	471	8 x M24/450	0,85x0,85x1,7
RMV-M-200E • D_A/D_E = 94/420							WF550/8xM24
20	9,5	9,5	2,0	17,1	563	8 x M24/550	1,4 x 1,4 x 1,8

The foundation structure and the mast installation conditions shall be designed according to the construction design for the installation site. The pre-cast foundation block dimensions are defined for moderate soil engineering parameters. The pre-cast foundation planting conditions shall be designed according to the construction design and the lamp mast assembly instructions for the actual site.

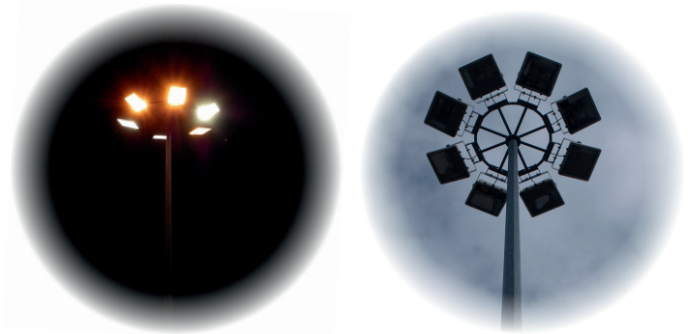

BUDGET POLYGONAL LAMP
MASTS



product certification



Our compliance with the European Community directives and harmonised standards has been certified and proven by the right to use the CE mark.