
I

I




Steel mast

height 14 - 16m, tubular shape



н		H1	m	n x Øs/A x B	Crown type a x a x h
m		m	kg	mm	m
RMV-M-140SRw/4	•	$D_A/D_E =$	114/2	05	WF354/4xM24
14		9,0	230	4 x M24/250x250	0,6 x 0,6 x 1,6
RMV-M-160SRw/4	•	$D_A/D_E =$	114/2	205	WF354/4xM24
16		9,0	250	4 x M24/250x250	0,6 x 0,6 x 1,7

The foundation structure and the mast installation conditions shall be designed according to the construction design for the installation site. The pre-cast foundation block dimensions are defined for moderate soil engineering parameters. The pre-cast foundation planting conditions shall be designed according to the construction design and the lamp mast assembly instructions for the actual site.

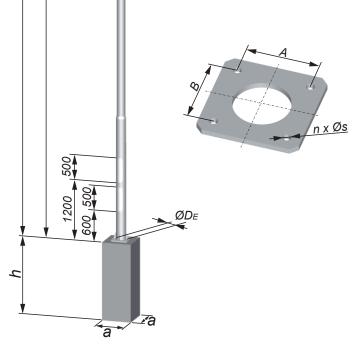





Our compliance with the European Community directives and harmonised standards has been certified and proven by the right to use the CE mark.